



## Applied Physics Laboratory

University of Washington

---

1013 NE 40<sup>th</sup> Street  
Box 355640  
Seattle, WA 98105-6698

206-543-1300  
FAX 206-543-6785  
[www.apl.washington.edu](http://www.apl.washington.edu)

27 October 2016

**To:** Dr. Robert H. Headrick  
Office of Naval Research (Code 322)  
875 North Randolph Street  
Arlington, VA 22203-1995

**From:** Dr. James A. Mercer, Principal Investigator

**Subj:** ONR Grant# N00014-14-1-0218, "North Pacific Acoustic Lab and Deep Water Acoustics"

**Encl:** (1) Final Technical Report for Subject Grant  
(2) SF298 for Enclosure

Enclosure (1) is the Final Technical Report for the subject grant. Enclosure (2) is the SF 298 form. These documents constitute the Final Technical Report and deliverable for ONR Grant# N00014-14-1-0218.

cc: Grant & Contract Administrator, APL-UW  
Office of Sponsor Programs, UW  
ONR Seattle – Evan Wood and Kyoo-hui Beal  
Naval Research Laboratory  
Defense Technical Information Center

**North Pacific Acoustic Laboratory and Deep Water Acoustics**  
**Final Report**

PI James A. Mercer  
Applied Physics Laboratory, University of Washington  
1013 NE 40<sup>th</sup> Street, Seattle, WA 98105  
phone: (206) 543-1361 fax: (206) 543-6785 email: [mercera@apl.washington.edu](mailto:mercera@apl.washington.edu)  
[http://www.apl.washington.edu/projects/blue\\_water/index.html](http://www.apl.washington.edu/projects/blue_water/index.html)

Award Number N00014-14-1-0218

This two-year grant actually extended from 1 March 2014 to 30 September 2016. The great majority of the effort was expended in 2015. In fact, only about \$14K was received in 2016. The Annual Reports for FY2014 and FY2015 are included as attachments.

During FY16 the primary effort has been working on manuscripts as summarized below:

- 1) A test of deep water Rytov theory at 284 Hz and 107 km in the Philippine Sea. (authors - Andrew, White, Mercer, Dzieciuch, Worcester, and Colosi). This paper was published in the October 2015 issue of JASA.
2. Internal tides and deep diel fades in acoustic intensity (authors - White, Henyey, Andrew, and Mercer). This paper was revised and re-titled and submitted to JASA in August 2016.
3. Low-frequency pulse propagation over 510 km in the Philippine Sea: A comparison of observed and theoretical pulse spreading (authors - Andrew, Ganse, White, Mercer, Dzieuch, Worcester, and Colosi). This paper was published in the July 2016 issue (140) of JASA.
4. The vertical structure of eddies in the Subtropical Countercurrent, western Philippine Sea. (authors - Ramp, Colosi, Worcester, Bahr, Heaney, Mercer, and Van Uffelen. This paper was submitted to Deep Sea Research in May of 2016.
5. Decadal trends in low-frequency ambient ocean noise for seven sites in the North Pacific Ocean. (authors - Andrew, Howe, and Mercer). This paper was submitted to JUA in February of 2016.
6. A manuscript is in initial preparation by Rex Andrew. The subject is selected intensity sample distributions from the Philippine Sea.

## Attachment 1: FY14 Annual Report

*Approved for public release; distribution is unlimited.*

### **North Pacific Acoustic Laboratory and Deep Water Acoustics**

PI James A. Mercer

Applied Physics Laboratory, University of Washington

1013 NE 40<sup>th</sup> Street, Seattle, WA 98105

phone: (206) 543-1361 fax: (206) 543-6785 email: [mercera@apl.washington.edu](mailto:mercera@apl.washington.edu)

[http://www.apl.washington.edu/projects/blue\\_water/index.html](http://www.apl.washington.edu/projects/blue_water/index.html)

CO-PI Andrew White

Applied Physics Laboratory, University of Washington

1013 NE 40th Street, Seattle, WA 98105

phone: (206) 685-7977 fax: (206) 685-7977 email: [andrew8@apl.washington.edu](mailto:andrew8@apl.washington.edu)

[http://www.apl.washington.edu/projects/blue\\_water/index.html](http://www.apl.washington.edu/projects/blue_water/index.html)

Award Number N00014-08-1-0843

Award Number N00014-13-1-0053

Award Number N00014-14-1-0218

### **LONG-TERM GOALS**

The ultimate limitations to the performance of long-range sonar are due to ocean sound speed perturbations and the characteristics of the ambient acoustic noise field. Scattering and diffraction resulting from internal waves and other ocean processes limit the temporal and spatial coherence of the received signal, while the ambient noise field is in direct competition with the received signal. Research conducted in the North Pacific Acoustic Laboratory (NPAL) and Deep Water Acoustics programs at the Applied Physics Laboratory (APL-UW) is directed toward a complete understanding of the basic physics of low-frequency, long-range, deep water, broadband acoustic propagation, the effects of ocean variability on signal coherence, and the fundamental limits to signal processing at long-range that are imposed by ocean processes. The long-term goal of this research is to optimize advanced signal processing techniques, including matched-field processing and adaptive array processing methods, based upon knowledge about the multi-dimensional character of the propagation and noise fields and their impact on long-range ocean acoustic signal transmissions.

## OBJECTIVES


The scientific objectives of the North Pacific Acoustic Laboratory and Deep Water Acoustics research are:

1. To study the spatial and temporal coherence of long-range, low-frequency resolved rays and modes and the dependence upon ocean processes, transmission distance, and signal frequency.
2. To explore the range and frequency dependence of the higher order statistics of resolved ray and mode arrivals and of the highly scattered finale observed in previous experiments.
3. To define the characteristics and trends, and determine the relative causes of low-frequency ambient noise on ocean basin scales.
4. To elucidate the roles of internal waves, ocean spice, internal tides, fronts and eddies in causing fluctuations in acoustic receptions.
5. To improve basin-scale ocean sound-speed predictions via assimilation of acoustic travel-time and other data into numerical ocean-dynamic models.
6. To fully analyze our experiment in the Philippine Sea, the results of which will support all of the objectives listed above.

## APPROACH

APL-UW employs a combination of experimental measurements, data analysis, simulations, and theoretical development to address the objectives outlined above. These activities are funneled through two primary avenues. *The North Pacific Ambient Noise Laboratory*, operated and maintained by APL-UW, provides a full-time laboratory for real-time acoustic measurements at a selection of basin-scale locations, the capability to test various transmission signals, and ambient noise (including marine mammals) measurements in the NE Pacific Ocean. The Laboratory consists of legacy SOSUS hydrophone receivers in the Pacific Ocean, and a data processing and archive center at the Applied Physics Laboratory.

The second avenue includes highly focused, comparatively short-term experiments. We have completed a pilot study/engineering test and an experiment in the *Philippine Sea* called **PhilSea9** and **PhilSea10**, respectively [1]. See Figure 1. The principal elements of the APL-UW effort during the 2010 experiment were: 1) a 55-hour continuous transmission from ship stop SS500 at 500 km from the DVLA and a depth of 1000 m, 2) a tow of a CTD Chain along the path toward the Distributed Vertical Line Array (DVLA) from SS500, 3) a source tow at a depth of 150 m at ranges between 25 and 43 km from the DVLA through the region of a Reliable Acoustic Path (RAP) from the near-surface region to the water column bottom, 4) a series of CTD casts every 10 km from the DVLA back to SS500, and 5) a 55-hour continuous transmission from SS500 at a depth of 1000 m to the DVLA. The primary institutions participating in PhilSea10 were APL-UW, the Scripps Institution of Oceanography (SIO), and the Massachusetts Institute of Technology (MIT).

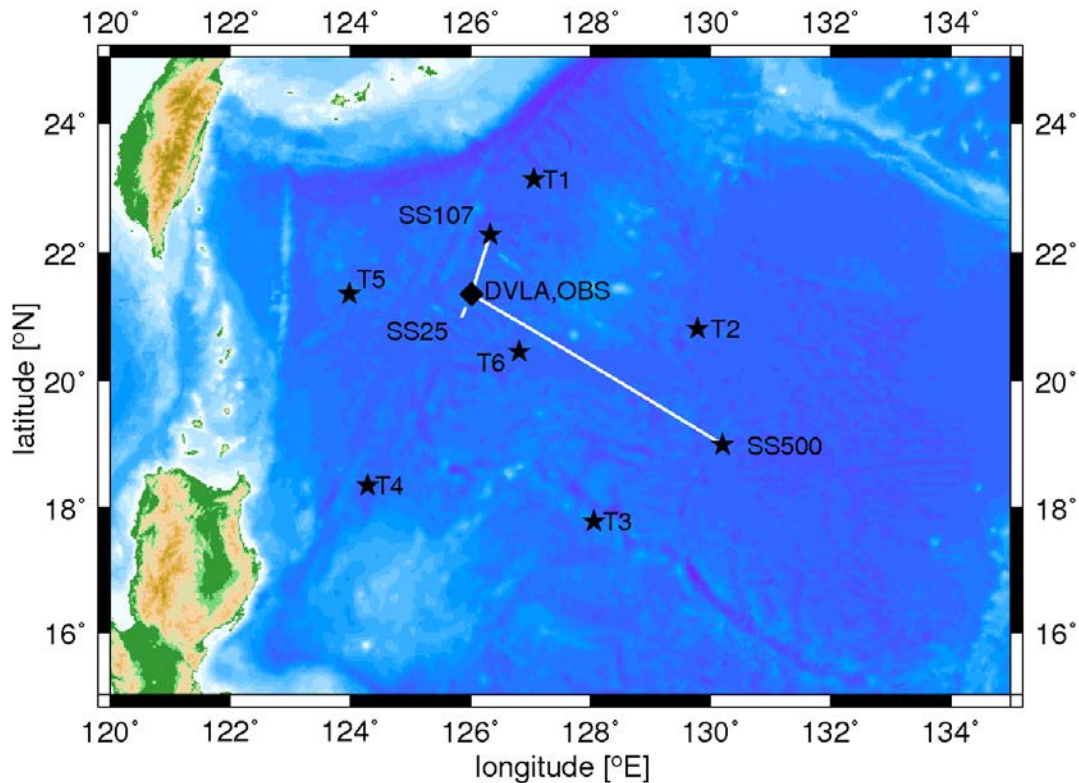

*Figure 1. Principal activity locations for PhilSea9 and PhilSea10*

## WORK COMPLETED

### I. Award Number N00014-08-1-0843

The PI's work on this grant was for the most part completed at the end of FY2013. Carry over funds amounting to approximately 2.5% of the total funding were extended to FY2014. The primary work with these funds was guidance and support to Andrew White as a new Post Doc.

In addition work was completed at the Barbers Point shore termination station, the Kauai transmitter station, and collaborative efforts with Gerald D'Spain at the Marine Physical Laboratory.

Due to the transfer of property from the US Navy to the State of Hawaii the Barbers Point shore termination station was closed. The contents of the station were removed and taken to the University of Hawaii Marine Facility. Most of the hardware was eventually scrapped but some was retained by the Marine Facility for future projects.

It was noticed in October 2014 that communications between APL-UW and the Kauai transmitter station had ceased. It was determined that the microprocessor responsible for selecting various hardware channels at the site had failed. A new microprocessor was installed and communications providing periodic hardware status have resumed. Transmissions from this site are no longer executed.

A collaboration with Gerald D'Spain at the Marine Physical Laboratory (MPL) has continued. Data from PhilSea10 during the Drift Test have corrected for Doppler shift, processed and provided to MPL. The collaboration will continue as the analysis progresses.

## **II. Award Number N00014-13-1-0053**

In his two-year post-doctoral research proposal, Dr. White proposed to explore the possible roles of internal tides, surface mixed layers, and range-dependence in acoustic fluctuations that were measured during the PhilSea09 and PhilSea10 experimental efforts. He also proposed to process the PhilSea10 data. Completion of his doctoral degree delayed the start of the post-doctoral work until September 2013. In the intervening time, Dr. Rex Andrew's group had begun processing of the 2010 500 km data. Dr. White has collaborated closely with Dr. Andrew's group, and it was therefore decided that while the group processed the data, Dr. White would design and perform Monte Carlo Parabolic Equation (MCPE) simulations to be compared with the measured acoustic propagation data. Progress made thus far under the post-doctoral proposal has included analysis of a subset of the Conductivity-Temperature-Depth (CTD) measurements made at the Distributed Vertical Line Array (DVLA); design, construction, and completion of the broadband, 500-km-range MCPE simulations for center frequencies of 200, 300, and 81 Hz; and modeling of propagation through internal-tide perturbed environments involving background sound speed profiles both with and without near-surface mixed layers. More detailed descriptions of these efforts are below.

## **III. Award Number N00014-14-1-0218**

This award provided guidance and technical support for Andrew White in his Post Doc efforts.

## **NEW RESULTS**

### **I. Award Number N00014-08-1-0843 and Award Number N00014-14-1-0218**


New results for these awards are recorded in New Results Section II.

### **II. Award Number N00014-13-1-0053**

#### **Internal Tide Simulations**

Simulated internal-tide-perturbed sound speed environments were constructed for the purpose of exploring the possible variability in acoustic intensity that may be introduced by the tides. The environmental models consisted of plane waves traveling due East; the model included only the

first vertical eigenmode associated with the frequency of the diurnal tide. The first mode for the semidiurnal frequency is essentially the same as that for the diurnal, so some of the conclusions of the study will apply to both diurnal and semidiurnal tides. The difference between the tides at these two frequencies is in the range-dependence: the horizontal wave number for the diurnal tide is less than half that of the semidiurnal tide.

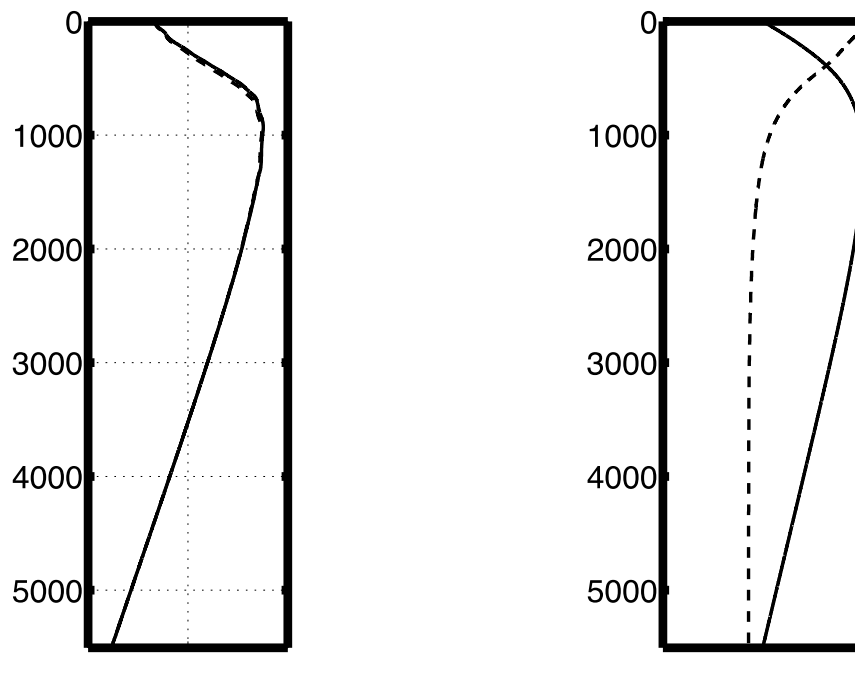

**Figure 2.** *The slowness profile in the simulated internal-tide perturbed ocean at times that are 12 hours apart are shown in the left and middle panels; the middle panel is the same as the left, except that only depths down to 1400 m are shown. The first vertical displacement mode at tidal frequency is shown by the solid curve, and its derivative with respect to depth-the strain-shown by the dashed curve, appear in the panel at the right.*


The first vertical mode is shown in figure 2, along with its vertical derivative (the strain) and with one of the sound speed slowness profiles used in this work. The slowness is shown at times that are 180 degrees apart in the tidal phase. The mode at this frequency causes a displacement of the same sign at all depths; the displacement is greatest near 1200 m depth, and decreases toward the ocean surface and toward the ocean bottom. The strain profile shows that the greatest strain occurs in the upper ocean, and then has the opposite sign at depths deeper than about 1200 m. The effect of this straining of the sound speed slowness profile is to decrease or increase, on average over depth, the first derivative with depth of the profile, with the greatest change occurring in the upper ocean.

The presence of mesoscale variability at the location of the PhilSea09 pilot study was seen in SSH measurements and corroborated with the CTD time series recorded by the CTD instruments on the DVLA [2]. Single profiles were low-pass filtered in the vertical to include only scales




larger than 100 m, and then used as representative range-independent background profiles to be perturbed by the internal tides in this study. Comparison of results between the different profiles provides information about the uncertainties caused by a limited knowledge of the background sound speed.

Broadband propagation through perturbed range-depth ocean slices was calculated using the Navy Standard Parabolic Equation (NSPE) code. The arrival corresponding to ray path ID-3 was windowed out from the resulting time fronts. This path exhibited intensity fades of 10 dB that lasted 18 and 12 h, respectively, in measurements obtained during PhilSea09 [2, 3]. An example of the simulated intensity profile vs. depth for path ID-3 at 1-h intervals spanning 24 h is shown in figure 3. Variability in intensity at a given depth is predicted to occur due to the mode-1 displacement of the slowness profile.

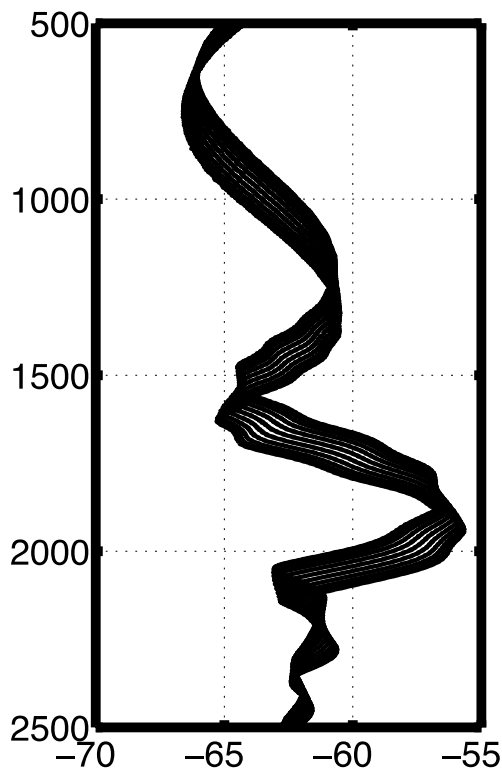

**Figure 2. Intensity profiles calculated by the NSPE during the evolution of the mode-1 internal tide. The right panel is the same as the left panel, except that only depths from 800 to 1400 m are shown. Each curve is the intensity vs. depth at times separated by one hour; times spanning one diurnal tidal cycle (24 h) is shown here.**

Propagation was then also calculated using a Hamiltonian ray-trace code that was developed previously by Dr. Frank Henyey. The parabolic equation (PE) is expected to contain all of the correct physics of the propagation, but what happens to the sound along its path is not revealed. When the ray-trace agrees with the PE, quantities associated with a given path that have been output all along the path then allow interpretation of the PE result.

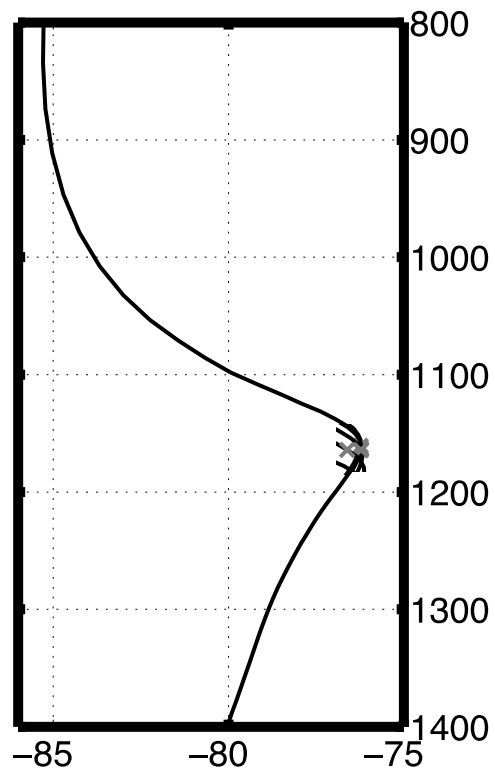

***Figure 4. Intensity profiles calculated using Hamiltonian ray-tracing. The right panel is the same as the left, except that only depths from 800 to 1400 m are shown. The diamond-shaped symbols show the arrival depth and corresponding intensity of rays with the same initial angle, as the tide evolved.***

The ray calculation does not capture all features of the intensity profile (see figure 4)—which is to be expected due to the infinite-frequency assumption inherent in a ray model. The high-intensity values at depths near 2000 m are due to a surface bounce. This study focuses on the rays composing the reasonably well-modeled local maximum in intensity around 1200 m.

It seems clear that the mode-1 internal tide causes the depth-dependence of the intensity to translate in the vertical while mostly retaining its shape in both the PE and ray calculations. Why is this the case? Analysis employing the Hamiltonian ray-tracing model provides some answers to this question, and leads to a deeper understanding of the effect of the internal tide on the acoustic intensity.

It is seen from the ray equations in the Hamiltonian formulation that the ray slope depends on the first vertical derivative of the slowness. The change in the average first derivative of the slowness caused by the straining of the internal tide causes a ray with a given initial angle to have a change in the average magnitude of its slope; the ray therefore arrives at a different depth at the end range.

It was also found from one of the equations in the Hamiltonian formulation that the rate of change with range of ray spreading for perturbations to the initial angle (ray intensity is proportional to the perturbation in vertical distance between the rays for small changes in initial angle) is dominated by a term containing the second derivative with respect to depth of the slowness. The turning depth of the rays is changed little by the internal tide displacement, meaning that the rays with the same initial angle turn through roughly the same slowness features at their Upper Turning Point (UTP) depth (which affects the intensity associated with the ray via the slowness' second derivative) throughout the tidal cycle. Thus the intensity associated with a ray with a given initial angle is expected to change little, while the depth-of-arrival at the end range changes significantly. These effects result in a vertical translation of the depth-dependence of the intensity profile, as seen in figures 3 and 4.

Dr. White has begun preparation of a manuscript that will present the work described above.


### **MCPE simulations**

Displacements were computed from the CTD records for a month-long period of time, which included the time that the APL acoustic transmissions were made. Spectra were computed from these time series of displacement. The integral over the spectrum is equal to the variance of the displacement; this variance was used to determine the appropriate "GM strength ratio" [3, 4] to be used in the MCPE simulations. The strength ratio was found to be approximately 0.9—compared to the value of 1.6 as found from the same method for a similar time-period in 2009.

Dr. White performed a total of 240 broadband MCPE calculations (each, for three center frequencies of 81, 200, and 300 Hz) on a computer cluster, each through an independent realization of an internal-wave perturbed ocean. Arrivals corresponding to unique paths were windowed from the resulting time fronts. The arrivals and the depths at which they were extracted from the simulated time fronts are shown in figure 5. An undergraduate student who was working for Dr. Rex Andrew's group was tasked with organizing these windowed simulated arrivals into a database. Dr. Andrew's group also had the student create a corresponding database (for the 200 Hz signal, thus far) that was populated with arrivals measured during PhilSea10. The MCPE-simulated and the experimentally-measured databases will be shared between Dr. Andrew's group and Dr. White, facilitating various comparisons between MCPE and measurements.

### **COLLABORATIONS**

A large number of additional investigators have been involved in ONR-supported research related to the NPAL project and participate in the NPAL Workshops, including Art Baggeroer (MIT), J. Beron-Vera (UMiami), M. Brown (UMiami), T. Chandrayadula (NPS), J. Colosi (NPS), F. Henyey (APL-UW), V. Ostashev (NOAA/ETL), R. Stephen (WHOI), I. Udovydchenkow (WHOI), A. Voronovich (NOAA/ETL), K. Wage (George Mason Univ.), Peter Worcester (Scripps), and others. In addition, we have begun close collaboration with Gerald D'Spain (MPL).

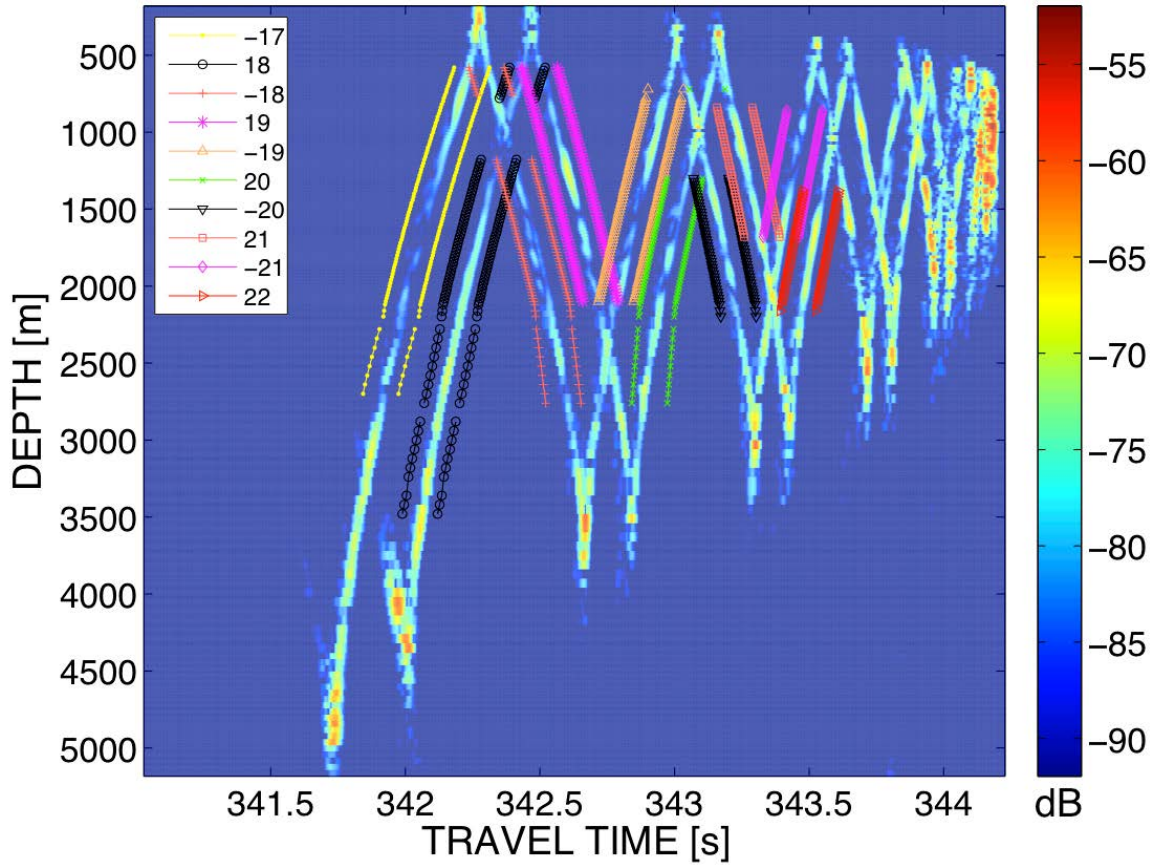

*Figure 5. An example of the MCPE timefronts, including windows used to extract particular paths (associated with ID labels that are shown in the legend) from the simulated data. The simulated data was windowed only at the depths for which there are available measured data for comparison.*

## IMPACT/APPLICATIONS

This research has the potential to affect the design of long-range acoustic systems, whether for acoustic surveillance, communication, or remote sensing of the ocean interior. The data from the NPAL network, and the special NPAL experiments, indicate that existing systems do not exploit the limits of acoustic coherence at long ranges in the ocean. Estimates of basin-wide sound speed (temperature) fields obtained by the combination of acoustic, altimetry, and other data types with ocean general circulation models have the potential to improve our ability to make the acoustic predictions needed for matched field and other sophisticated signal processing techniques and to improve our understanding of ocean variability.

## REFERENCES

- [1] Worcester, P. F., Dzieciuch, M. A., Mercer, J. A., Andrew, R. K., Dushaw, B. D., Baggeroer, A. B., Heaney, K. D., D'Spain, G. L., Colosi, J. A., Stephen, R. A., Kemp, J. N., Howe, B. M., Van Uffelen, L. J., and Wage, K. E., The North Pacific Acoustic Laboratory (NPAL) deep-water acoustic propagation experiments in the Philippine Sea, *J. Acoust. Soc. Am.*, **134**, 3359-3375, 2013.
- [2] Andrew W. White, "Underwater Acoustic Propagation in the Philippine Sea: Intensity Fluctuations", PhD Thesis, University of Washington, 2013.
- [3] Andrew W. White, Rex K. Andrew, James A. Mercer, Peter F. Worcester, Matthew A. Dzieciuch, and John A. Colosi, "Wavefront intensity statistics for 284-Hz broadband transmissions to 107-km range in the Philippine Sea: observations and modeling", *J. Acoust. Soc. Am.*, **134**, 3347, 2013.
- [4] W. H. Munk. Internal waves and small-scale processes. In C. Wunsch and B. Warren, editors, *The Evolution of Physical Oceanography*, pages 264–291. MIT Press, Cambridge MA, 1981

*Approved for public release; distribution is unlimited.*

## **North Pacific Acoustic Laboratory and Deep Water Acoustics**

PI James A. Mercer

Applied Physics Laboratory, University of Washington

1013 NE 40<sup>th</sup> Street, Seattle, WA 98105

phone: (206) 543-1361 fax: (206) 543-6785 email: [mercera@apl.washington.edu](mailto:mercera@apl.washington.edu)

[http://www.apl.washington.edu/projects/blue\\_water/index.html](http://www.apl.washington.edu/projects/blue_water/index.html)

CO-PI Andrew White

Applied Physics Laboratory, University of Washington

1013 NE 40th Street, Seattle, WA 98105

phone: (206) 685-7977 fax: (206) 685-7977 email: [andrew8@apl.washington.edu](mailto:andrew8@apl.washington.edu)

[http://www.apl.washington.edu/projects/blue\\_water/index.html](http://www.apl.washington.edu/projects/blue_water/index.html)

Award Number N00014-13-1-0053

Award Number N00014-14-1-0218

### **LONG-TERM GOALS**

The ultimate limitations to the performance of long-range sonar are due to ocean sound speed perturbations and the characteristics of the ambient acoustic noise field. Scattering and diffraction resulting from internal waves and other ocean processes limit the temporal and spatial coherence of the received signal, while the ambient noise field is in direct competition with the received signal. Research conducted in the North Pacific Acoustic Laboratory (NPAL) and Deep Water Acoustics programs at the Applied Physics Laboratory (APL-UW) is directed toward a complete understanding of the basic physics of low-frequency, long-range, deep water, broadband acoustic propagation, the effects of ocean variability on signal coherence, and the fundamental limits to signal processing at long-range that are imposed by ocean processes. The long-term goal of this research is to optimize advanced signal processing techniques, including matched-field processing and adaptive array processing methods, based upon knowledge about the multi-dimensional character of the propagation and noise fields and their impact on long-range ocean acoustic signal transmissions.

## OBJECTIVES


The scientific objectives of the North Pacific Acoustic Laboratory and Deep Water Acoustics research are:

1. To study the spatial and temporal coherence of long-range, low-frequency resolved rays and modes and the dependence upon ocean processes, transmission distance, and signal frequency.
2. To explore the range and frequency dependence of the higher order statistics of resolved ray and mode arrivals and of the highly scattered finale observed in previous experiments.
3. To define the characteristics and trends, and determine the relative causes of low-frequency ambient noise on ocean basin scales.
4. To elucidate the roles of internal waves, ocean spice, internal tides, fronts and eddies in causing fluctuations in acoustic receptions.
5. To improve basin-scale ocean sound-speed predictions via assimilation of acoustic travel-time and other data into numerical ocean-dynamic models.
6. To fully analyze our experiment in the Philippine Sea, the results of which will support all of the objectives listed above.

## APPROACH

APL-UW employs a combination of experimental measurements, data analysis, simulations, and theoretical development to address the objectives outlined above. These activities are funneled through two primary avenues. *The North Pacific Ambient Noise Laboratory*, operated and maintained by APL-UW, provides a full-time laboratory for real-time acoustic measurements at a selection of basin-scale locations, the capability to test various transmission signals, and ambient noise (including marine mammals) measurements in the NE Pacific Ocean. The Laboratory consists of legacy SOSUS hydrophone receivers in the Pacific Ocean, and a data processing and archive center at the Applied Physics Laboratory.

The second avenue includes highly focused, comparatively short-term experiments. We have completed a pilot study/engineering test and an experiment in the *Philippine Sea* called **PhilSea9** and **PhilSea10**, respectively [1]. See Figure 1. The principal elements of the APL-UW effort during the 2010 experiment were: 1) a 55-hour continuous transmission from ship stop SS500 at 500 km from the DVLA and a depth of 1000 m, 2) a tow of a CTD Chain along the path toward the Distributed Vertical Line Array (DVLA) from SS500, 3) a source tow at a depth of 150 m at ranges between 25 and 43 km from the DVLA through the region of a Reliable Acoustic Path (RAP) from the near-surface region to the water column bottom, 4) a series of CTD casts every 10 km from the DVLA back to SS500, and 5) a 55-hour continuous transmission from SS500 at a depth of 1000 m to the DVLA. The primary institutions participating in PhilSea10 were APL-UW, the Scripps Institution of Oceanography (SIO), and the Massachusetts Institute of Technology (MIT).

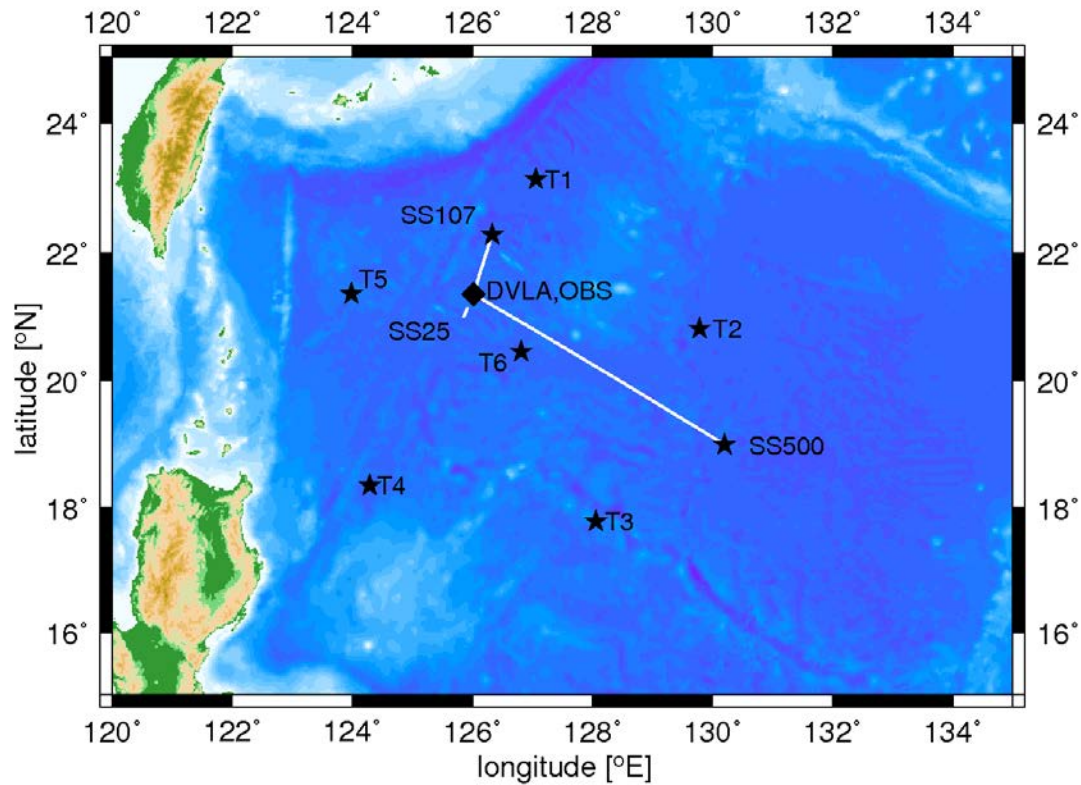

*Figure 1. Principal activity locations for PhilSea9 and PhilSea10*

## **WORK COMPLETED**

### **I. Award Number N00014-13-1-0053**

This post-doctoral award included analysis of a subset of the CTD measurements made at the DVLA during PhilSea10; design, construction, and completion of the broadband, 500-km-range MCPE simulations for center frequencies of 200, 300, and 81 Hz; some comparisons of the simulated data to measured data from PhilSea10; and modeling with broadband PE and Hamiltonian ray-trace codes, of propagation through internal-tide (IT) perturbed environments--relating to PhilSea09. Dr. White has prepared, and sent to co-authors, a manuscript that describes the IT results [2]. The IT work and conclusions are described in New Results Section I below.

### **II. Award Number N00014-14-1-0218**

During this award period Dr. Mercer retired from his full-time position at the University of Washington and was re-appointed to a part-time position. In this new position, the Director of



the Applied Physics Laboratory has assigned the following responsibilities: Dr. Mercer "will collaborate with APL scientists and engineers using expertise in deep water acoustics in the effort of processing and analyzing the acoustic transmissions from the PhilSea10 Experiment. As the PI, (Dr. Mercer) will continue to play a role in the complete research process, including managing the project and technical reporting. These duties are completed through frequent collaborations with other members of the Acoustics Department. Additionally, (Dr. Mercer) will be providing advisement to graduate students as well as the national funding agencies and will also continue to supervise a post-doctoral research associate on the project as well."

Results of this effort are shown in a New Results Section II below.

## NEW RESULTS

### I. New Results Award Number N00014-13-1-0053

During PhiSea09 the acoustic intensity of one of the ray paths exhibited fades of up to 10 dB that lasted 18 and 12 h, respectively [3,4]. The modeling that is presented in this section was done to test the hypothesis that the internal tide (IT) caused these intensity fades. Theoretical considerations would lead one to believe that sound-speed inhomogeneity on scales as large as those of the tides should not affect the intensity (e.g. Desaubies (1978) [5]) - however, a viable alternative hypothesis is not obvious. The results of this work indicate that the IT could cause intensity fluctuations.

The IT environmental models consisted of plane waves traveling due East; the model included only the first vertical eigenmode associated with the frequency of the diurnal tide. The amplitude of this eigenmode was adjusted according to the variance of the vertical displacement measured on microCAT CTDs mounted on the DVLA during PhilSea09.

Displacement  $\zeta(z, r, T)$  in the internal-tide model was given by

$$\zeta(z, r, T) = a \psi_1(z) \exp(i [\omega_1 T + \mathbf{k}_h \cdot \mathbf{r}])$$

in which  $\psi_1(z)$  is the first mode of vertical displacement,  $a$  is the modal amplitude,  $\omega_1$  is the modal phase speed,  $\mathbf{k}_h$  is the horizontal wavenumber vector, and  $\mathbf{r}$  is the vector pointing from SS107 to the DVLA. The angle  $\alpha$  that is listed in table 1 is the angle between the vectors  $\mathbf{k}_h$  and  $\mathbf{r}$ . The evolution time of the internal tide was  $T$ , where

$$T \in \{1, 2, 3 \dots 24\} \text{ (hour)}.$$

Satellite measurements analyzed by Zhao (2014) [6] (see his figures 4 and 5) suggest that the Luzon Strait, which lies roughly 500 km due west of the site of the experiment, is the major source of the diurnal tide at the site of PhilSea09. That analysis took a time-average over multiple years, while PhilSea09 was conducted over a span of only approximately 2.5 diurnal periods; presumably, the relative contributions to the internal tide from various local bathymetric features varies with time (and, therefore, so does the tide's direction). We modeled the extreme

cases of acoustic propagation anti-parallel ( $\alpha = 180^\circ$ ) and perpendicular ( $\alpha = 90^\circ$ ) to  $\mathbf{k}_h$  to understand the effect of this uncertainty.

The presence of mesoscale variability at the location of the PhilSea09 pilot study was seen in SSH measurements and corroborated with the CTD timeseries recorded by the CTD instruments on the DVLA [3,4]. Single profiles from CTD casts made during PhilSea09 were low-pass filtered to include only scales larger than 100 m, and were then used as representative range-independent background profiles to be perturbed by the internal tides. Comparison of results between the different profiles provided information about the uncertainties caused by a limited knowledge of the background sound speed.

A summary of the model environments used for both the Hamiltonian ray-tracing and the PE calculations is given in Table 1.

**Table 1: Simulated environments.  $\alpha_0 \approx 107^\circ$ , and is an estimate of the angle  $\alpha$  during PhilSea09, made from ADCP measurements at the site of the DVLA.**


Sim.	A	B1	B2	B3	C	D	E	F
Prof. #	0	4	4	4	5	10	16	20
$\alpha$	$\alpha_0$	$90^\circ$	$180^\circ$	$\alpha_0$	$\alpha_0$	$\alpha_0$	$\alpha_0$	$\alpha_0$

Broadband propagation through perturbed range-depth ocean slices was calculated using the Navy Standard Parabolic Equation (NSPE) code. The arrival corresponding to path ID-3 was windowed out from the resulting timefronts and Fourier-transformed. The absolute square of the Fourier bin containing the 284-Hz contribution was taken to be the intensity—as was done in the case of the data from PhilSea09. The intensity vs. depth for profile c4 at times  $T \in \{1, 2, 3 \dots 24\}$  over the depth-span 800m to 1500 m is shown in Figure 2 below.

As can be seen in Figure 2, there is a depth-dependence of intensity over the span of depths shown, that is then translated in the vertical as the internal tide evolves in time. At a given receiver depth, this translation results in a changing intensity with time.

Some questions about the prediction noted in the previous paragraph occur to the authors: Is the direction of the internal tide relative to the direction of acoustic propagation (and thus the range-dependence of vertical displacement) important? Why is the acoustic intensity depth-dependent? Why does the variation of intensity with depth translate vertically with the internal tide?

The first question was answered by comparison of simulations B1 and B2: the angle between acoustic propagation and the internal tide doesn't significantly affect the magnitude of the intensity change at a given receiver depth.

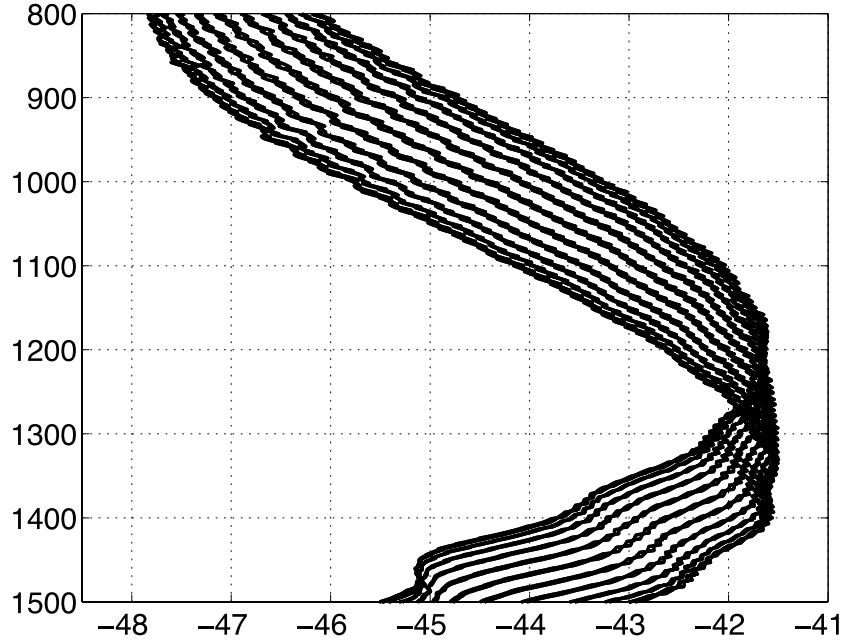


*Figure 2: Time-series of intensity vs. depth predicted by the PE for profile c4:  $I_4(z,T)$ ,  $T \in \{1, 2, 3...24\}$ , simulation B3.*

We will examine the results for profile c4 in detail, but this profile is not unique in producing a depth-dependence of intensity. Figure 3 shows all the profiles used here at depths from 0m to 200m in the left panel, along with the resulting intensity vs. depth for each case in the right panel. All profiles, except the smooth, average profile, result in depth-dependence of intensity, which is translated with the evolution of the tide.

In order to answer the questions mentioned above, propagation was also calculated using a Hamiltonian ray-trace code that was developed previously by Dr. Frank Henyey. The parabolic equation (PE) is expected to contain all of the correct physics of the propagation, but what happens along the path is not revealed. When the ray-trace agrees with the PE, quantities associated with a given path that have been output all along the path then allow interpretation of the PE result.

For example, Figure 4 shows the ray intensity vs. depth for ID-3 in profile 4 in the left panel. The dashed line shows the intensity vs. depth for the smooth, average profile c0. The right panel shows the third caustic for ID-3, which lies six km beyond the range of the DVLA. The “circle” marker shows the ray with the local maximum in intensity in the left panel, and the range and depth of that same ray at the deeper of the two cusps in the triplication in the right panel. Thus, the local maximum in intensity is associated with a cusp in the third caustic. There is no such triplication—and no local maximum in intensity—when profile c0 is the background sound speed.

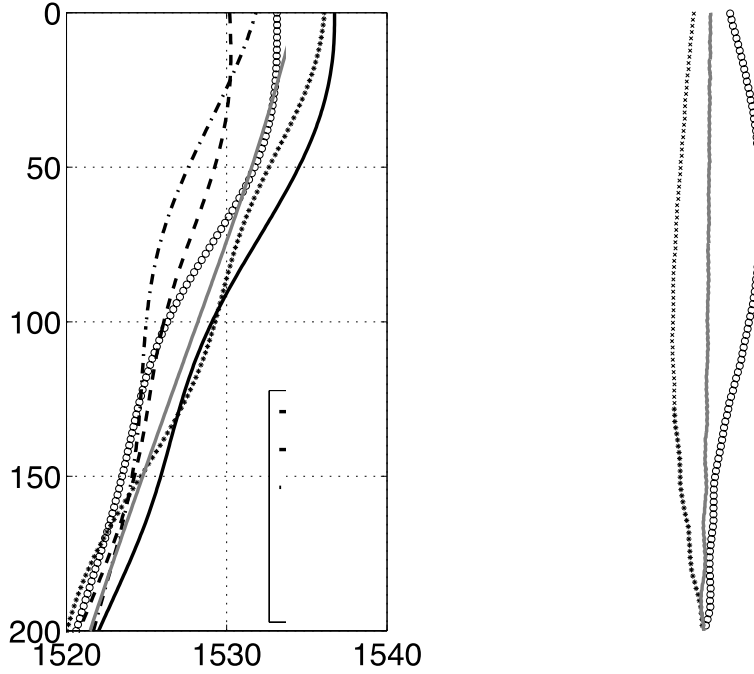


**Figure 3: Left panel: Shallowest 200m of selected sound-speed profiles used as the range-independent background in IT simulations. Profile 0 is the smooth, average profile used in MCPE calculations in White et. al. 2013. The other profiles were low-pass filtered to remove scales smaller than 100m. Right panel: Intensity vs. depth shown from 800m to 1500m.**

Figure 5 shows the changes in the position of the UTP of the ray with initial angle  $\theta_0$  that occur with the evolution of the internal tide through times  $T \in \{1, 2, 3 \dots 24\}$ , in simulations B1 and B2 (RI and RD cases, respectively).

In the RI case, the UTP moves back and forth along a curve. In the RD case, the UTP traces out an ellipse. The same is true for the triplication discussed above: in the RD case, the cusp associated with the local intensity maximum traces out an ellipse with a maximum horizontal displacement of approximately 508 m, and a maximum vertical displacement of about 22 m. In the RI case, the maximum displacements are roughly the same, but the cusp translates back and forth along a curve.


In the RI case that is shown in the bottom panel of Figure 6, the endpoints of the curve along which the UTP translates are UTPs of the rays with extrema in arrival depth. These same rays are also those with maximum or minimum turning-loop-distance. Here, we have made a connection between vertical displacement of arrival depth and turning-loop-distance.

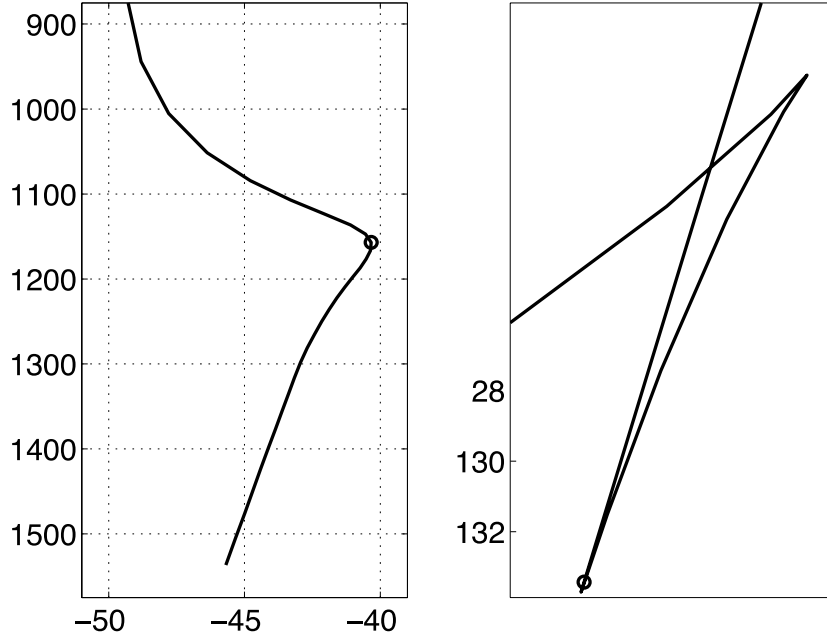


**Figure 4:** *Intensity vs. depth at the range of reception (left panel) and range of the third caustic vs. depth (right panel) for path ID-3. This third caustic lies just beyond the reception range of 106,601 m. In the left panel, the dashed line shows the result for ID-3 with profile  $c_0$  as the background, while the solid curve is the result for profile  $c_4$ , simulation B1,  $T = 1$ . The third caustic with profile  $c_0$  has no triplication, and is not shown here. The black circle in both panels is the intensity (left panel) or caustic position (right panel) for the ray leaving the source at angle  $\theta_0$ .*

The mode-one displacement at the diurnal frequency (the mode is essentially the same at semi-diurnal frequency) has non-zero amplitude over the whole water column. The greatest amount of straining occurs above the sound-speed axis—though there is a smaller strain of the opposite sign below the axis, as seen in the right-hand panel of Figure 4. The total effect of this straining is to cause the average over depth of  $|\partial_z S|$  to change sinusoidally with the phase of the tide. When the average  $|\partial_z S|$  is reduced (increased), the average slope of the ray is also reduced (increased). If we consider a ray with some initial angle, but a reduced average slope, we see that the turning-loop-distance is increased. For a receiver at a fixed range, this means that a range is reached at a different point along the ray's trajectory, and therefore at a different depth—causing the vertical translation. The relationship is shown in Figure 6 for simulation B1, the RI case.

It was also found from one of the equations in the Hamiltonian formulation that the rate of change with range of ray spreading for perturbations to the initial angle (ray intensity is proportional to the perturbation in vertical distance between the rays for small changes in initial angle) is dominated by a term containing the second derivative with respect to depth of the slowness. The ray with the local maximum intensity is displaced along with a contour of the second derivative with depth of the slowness at the UTP.

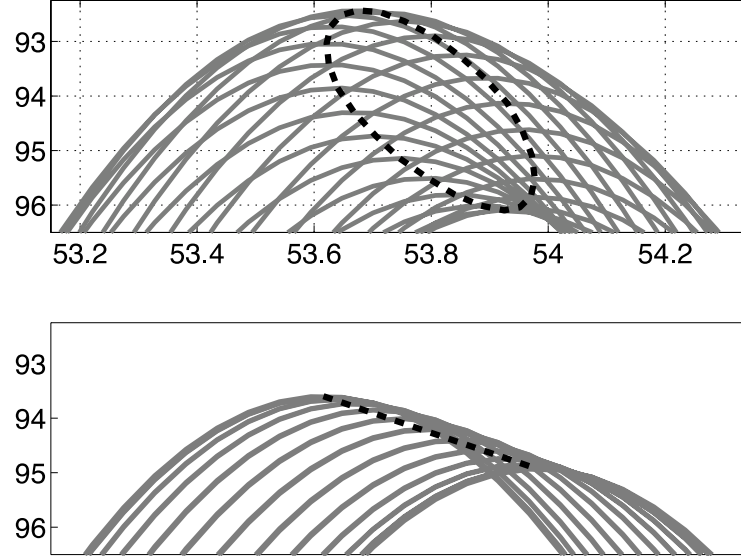

**Figure 5:** Evolution of the range and depth of UTP for ray ID-3 with initial angle  $\theta_0$ . Each curve shows the UTP of the ray with initial angle  $\theta_0$  after propagation through a different sound-speed environment, at times  $T \in \{1, 2, 3, \dots, 24\}$ . The top panel: RD case (simulation B2); bottom panel: RI case (simulation B1). The dashed curves pass through the UTPs at successive times to illustrate the time-order.

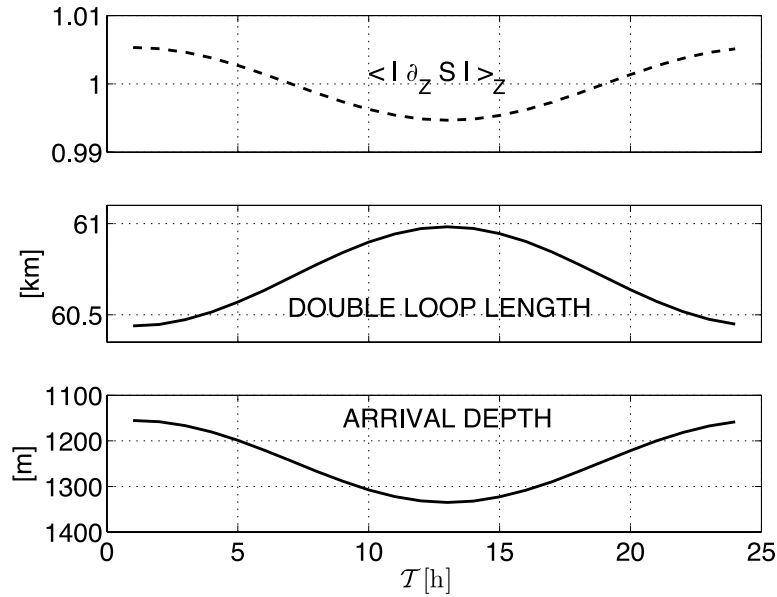

**Figure 6.** Top panel: Average over depth of the magnitude of the derivative of the slowness  $S$  ( $S = 1/c$ ) with respect to depth vs. time—normalized by the same average over depth for the unperturbed profile. Middle panel: Double-loop distance in km for a ray with initial angle  $\theta_0$  vs. time. Bottom panel: Arrival depth of the ray with initial angle  $\theta_0$  vs. time.

Dr. White presented the results of the IT simulations and some 2010 MCPE-data comparisons in two talks at the 2014 Philippine Sea Data Workshop. The titles of the two talks were, “Preliminary comparison of MCPE to PhilSea10 measurements for scintillation index”, and, “The effect of the internal tide’s first mode on acoustic intensity in PhilSea09”.

## **II. New Results Award Number N00014-14-1-0218**

New results for this grant have focused on co-authoring journal publications. Five manuscripts are in various stages of completion. Four of the papers address data from the Philippine Sea Experiment and the fifth is based on data from the Long-range Ocean Acoustics Experiment (LOAPEX) [1]. The titles and status of these manuscripts are provided below in the Publications Section.

## **IMPACT/APPLICATIONS**

This research has the potential to affect the design of long-range acoustic systems, whether for acoustic surveillance, communication, or remote sensing of the ocean interior. The data from the NPAL network, and the special NPAL experiments, indicate that existing systems do not exploit the limits of acoustic coherence at long ranges in the ocean. Estimates of basin-wide sound speed (temperature) fields obtained by the combination of acoustic, altimetry, and other data types with ocean general circulation models have the potential to improve our ability to make the acoustic predictions needed for matched field and other sophisticated signal processing techniques and to improve our understanding of ocean variability.

## **COLLABORATIONS**

A large number of additional investigators have been involved in ONR-supported research related to the NPAL project and participate in the NPAL Workshops, including Art Baggeroer (MIT), J. Beron-Vera (UMiami), M. Brown (UMiami), T. Chandrayadula (NPS), J. Colosi (NPS), F. Henyey (APL-UW), V. Ostashev (NOAA/ETL), R. Stephen (WHOI), I. Udovydchenkow (WHOI), A. Voronovich (NOAA/ETL), K. Wage (George Mason Univ.), Peter Worcester (Scripps), and others. In addition, we have begun close collaboration with Gerald D’Spain (MPL).

## **PUBLICATIONS**

White, Andrew W, Frank S. Henyey, Rex K. Andrew, James A. Mercer, Peter F. Worcester, and Matthew A. Dzieciuch, John A. Colosi, “The effect of the internal tide’s first mode on acoustic intensity in PhilSea09”, 2014 PhilSea Data Workshop, Anza Borrego, CA

White, Andrew W., Andrew A. Ganse, Rex K. Andrew, James A. Mercer, Peter F. Worcester,

Matthew A. Dzieciuch, John A. Colosi, "Preliminary comparison of MCPE to PhilSea10 measurements for scintillation index", 2014 PhilSea Data Workshop, Anza Borrego, CA

Chandrayadula, Tarun K., Kathleen E. Wage, Peter F. Worcester, Matthew A. Dzieciuch, James A. Mercer, Rex K. Andrew, and Bruce M. Howe, "Mode tomography using signals measured during the Long-range Ocean Acoustic Propagation EXperiment (LOAPEX)," submitted to JASA.

White, Andrew W., Frank S. Henyey, Rex K. Andrew, and James A. Mercer, Peter F. Worcester, Matthew A. Dzieciuch, and John A. Colosi, "How the internal tide could cause intensity fluctuations," in preparation.

Andrew, Rex K., Andrew W. White, and James A. Mercer, "A test of deep water Rytov theory at 284 Hz and 107 km in the Philippine Sea," JASA, in press

Ganse, Andrew A., Rex K. Andrew, Frank S. Henyey, James A. Mercer, Peter F. Worcester, and Matthew A. Dzieciuch, "Deep fades without destructive interference in the Philippine Sea long-range ocean acoustic experiment," in preparation

Andrew, Rex K., Andrew Ganse, Andrew W. White, James A. Mercer, Matthew A. Dzieciuch, and Peter F. Worcester, "Low-frequency pulse propagation over 509 km in the Philippine Sea: A comparison of observed and theoretical pulse spreading.

## REFERENCES

1. Mercer, J. A., Colosi, J. A., Howe, B. M., Dzieciuch, M. A., Stephen, R., and Worcester, P. F., LOAPEX: The Long-Range Ocean Acoustic Propagation EXperiment, *IEEE J. of Ocean. Eng.*, **34**, (1), 2009.

1. Andrew W. White, Rex K. Andrew, James A. Mercer, Frank S. Henyey, Peter F. Worcester, Matthew A. Dzieciuch, and John A. Colosi, "How the internal tide could cause intensity fluctuations"  
(sent to co-authors, intended for publication in JASA)

2. Andrew W. White, Rex K. Andrew, James A. Mercer, Peter F. Worcester, Matthew A. Dzieciuch, and John A. Colosi, "Wavefront intensity statistics for 284-Hz broadband transmissions to 107-km range in the Philippine Sea: observations and modeling", *J. Acoust. Soc. Am.* 134, 3347 (2013).

3. Andrew W. White, "Underwater Acoustic Propagation in the Philippine Sea: Intensity Fluctuations", PhD Thesis, University of Washington, 2013.

4. Desaubies, Y. J. F. "On the scattering of sound by internal waves in the ocean", *The Journal of the Acoustical Society of America* 64, 1460–1469 (1978).



5. Zhao, Z. “Internal tide radiation from the Luzon Strait”, *Journal of Geophysical Research: Oceans* 119, 5434–5448 (2014).

<b>REPORT DOCUMENTATION PAGE</b>				<i>Form Approved OMB No. 0704-0188</i>	
<small>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</small>					
<b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b>					
<b>1. REPORT DATE (DD-MM-YYYY)</b>		<b>2. REPORT TYPE</b>		<b>3. DATES COVERED (From - To)</b>	
<b>4. TITLE AND SUBTITLE</b>				<b>5a. CONTRACT NUMBER</b>	
				<b>5b. GRANT NUMBER</b>	
				<b>5c. PROGRAM ELEMENT NUMBER</b>	
<b>6. AUTHOR(S)</b>				<b>5d. PROJECT NUMBER</b>	
				<b>5e. TASK NUMBER</b>	
				<b>5f. WORK UNIT NUMBER</b>	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b>				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>				<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b>	
				<b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b>	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b>					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT</b>					
<b>15. SUBJECT TERMS</b>					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b>	<b>b. ABSTRACT</b>	<b>c. THIS PAGE</b>			<b>19b. TELEPHONE NUMBER (Include area code)</b>